

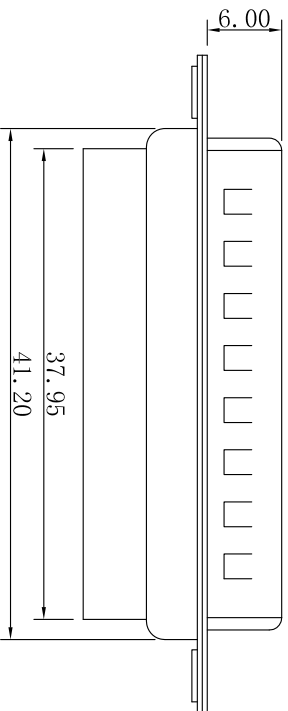



GP Component

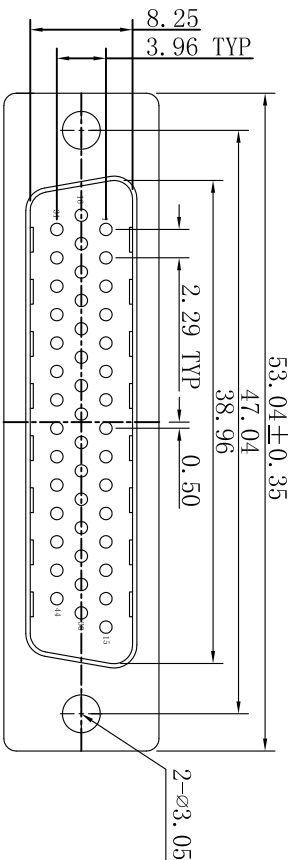

Specification Type

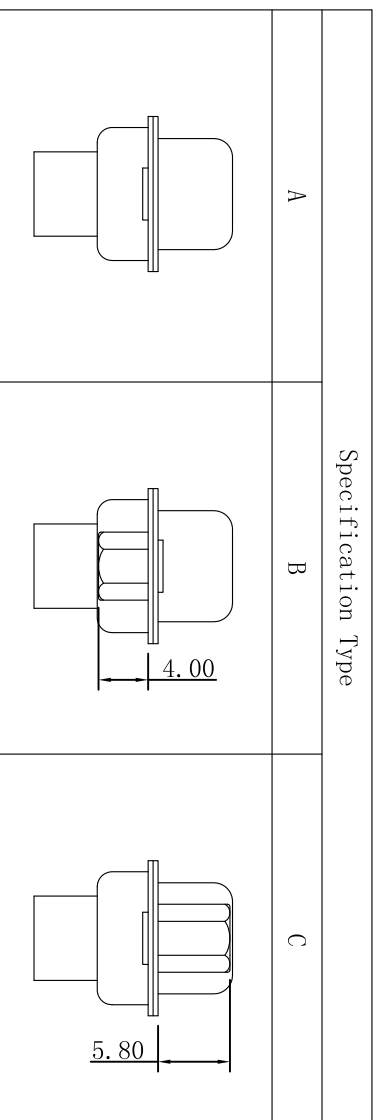

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			原始版本(INITIAL EDITION)	2021.01.05	m t

CHARACTERISTICS:

1. RATED VOLTAGE: 250V
2. RATED CURRENT: 3.0AMP
3. CONTACT RESISTANCE: 30mΩ Max.
4. INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
5. Electric Pressure: Keeping 60 second in AC 500V/1mA
6. Operating temperature: -55℃~105℃
7. INSERTION/EXTRACTION FORCE PER CONTACT: 9.08Kg Max 0.78Kg Min.

01.HDEC44 M X XXX XX A XXX

PIN Poles	44:44PIN								
M/F Differentiates	M=Male F=Female								
Hsg Color	1=Black 3=Blue 2=White 4=Green 5=Yellow 6=Purple								
Plating	G00:Gold flash G01:Gold 1U" G03:Gold 3U" Gxx:Gold XXU"								
	B00:Bright sn B01:Bright sn 1U" B03:Bright sn 3U" Bxx:Bright sn XXU"								
	M00:Matte sn M01:Matte sn 1U" M03:Matte sn 3U" Mxx:Matte sn XXU"								

	DESIGN:	2021.01.05		东莞市跃展精密连接器有限公司 Dongguan YueZhan Precision Connectors Co., Ltd
	CHECKED:	2021.01.05		
TOLERANCE:	X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 Angle ±3.0°	APPROVED:	2021.01.05	
SCALE:1:1	SIZE:A4	SHEET NO.	01 OF 01	