
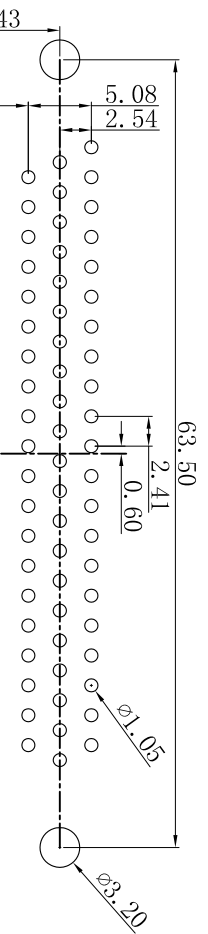
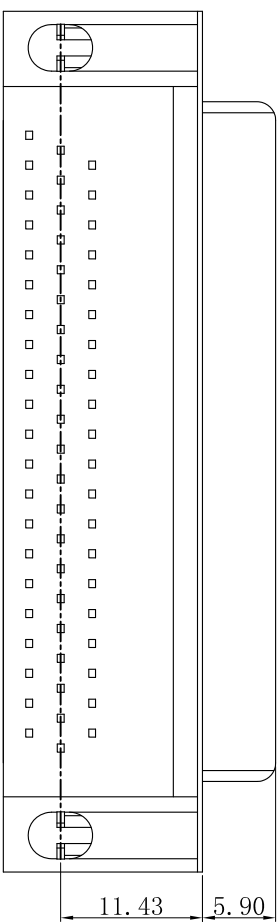
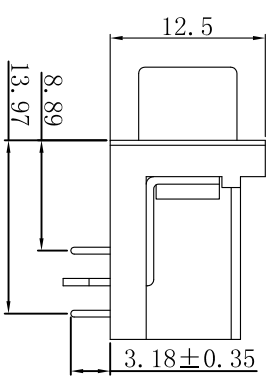



# GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			原始版本(INITIAL EDITION)	2021.01.05	m t

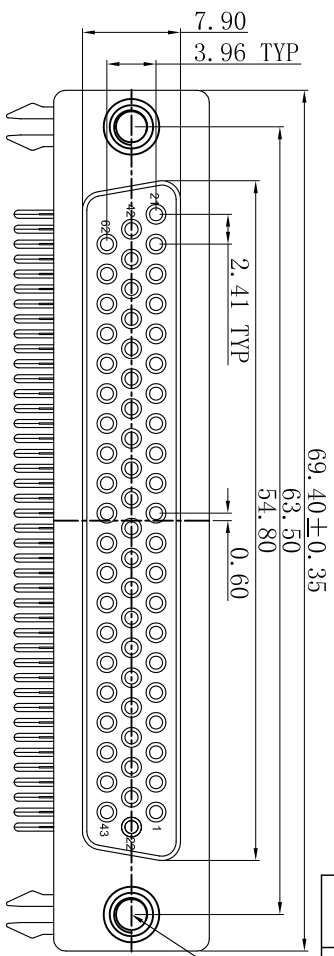

PCB Layout

Specification Type (1:2)

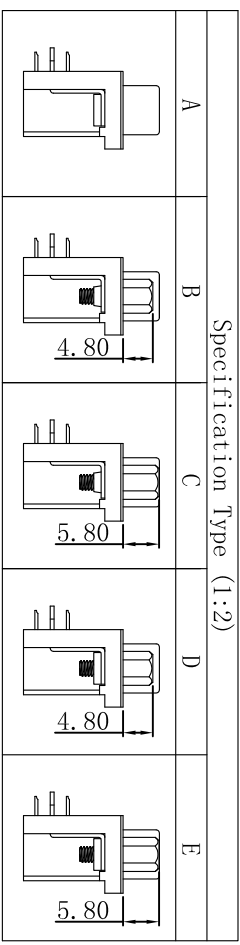

- CHARACTERISTICS:
1. RATED VOLTAGE: 250V
  2. RATED CURRENT: 3.0AMP
  3. CONTACT RESISTANCE: 30mΩ Max.
  4. INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
  5. Electric Pressure: Keeping 60 second in AC 500V/1mA
  6. Operating temperature: -55℃~105℃
  7. INSERTION/EXTRACTION FORCE PER CONTACT: 13.2Kg Max  
1.1Kg Min.

01.HDR862 F X XXX XX A XXX

PIN Poles	62:62PIN	M/F Differentiates	M=Male F=Female	Hsg Color	1=Black 3=Blue 5=Yellow 2=White 4=Green 6=Purple	Plating	G00:Gold flash G01:Gold 1U" G03:Gold 3U" Gxx:Gold XXU"	B00:Bright sn B01:Bright sn 1U" B03:Bright sn 3U" Bxx:Bright sn XXU"	M00:Matte sn M01:Matte sn 1U" M03:Matte sn 3U" Mxx:Matte sn XXU"	Water Code	H1=PB1 HF H4=PA66 HF H5=PCP H2=PA6T HF H3=PA9T HF H8=PA9T HF H9=PA9T HF H10=PB1 H11=PA6T H12=PA9T H13=PA66 H14=PA46	Specification Type	Hsg Material
-----------	----------	--------------------	-----------------	-----------	--	---------	---	---	---	------------	--	--------------------	--------------

<p>东莞市跃展精密连接器有限公司 Dongguan YueZhan Precision Connectors Co., Ltd</p>	DESIGN: 牟 2021.01.05	PART NAME: HDR 62P系列图
	CHECKED: 牟 2021.01.05	
APPROVED: 牟 2021.01.05	DRAW NO:	SHEET NO: 01 OF 01
SCALE:1:1 SIZE:A4		

